

**MOTOR DATA @ 230 VAC (TRAP)**

MOTOR PARAMETERS	UNITS	VALUE
HORSEPOWER	HP RATED	2.4
KILOWATTS	KW RATED	1.8
MAX. OPERATING SPEED	N MAX	2100
SPEED @ RATED TORQUE	RPM	1500
* CONTINUOUS RATED TORQUE @ 1500 RPM	IN-LBS [Nm]	104.0 [11.7]
* CONTINUOUS STALL TORQUE	IN-LBS [Nm]	116.2 [13.1]
CONTINUOUS LINE CURRENT	AMPS	9.4
PEAK TORQUE	IN-LBS [Nm]	406.7 [45.7]
PEAK CURRENT	AMPS	32.8
MAX. THEORETICAL ACCEL.	RAD/SEC <sup>2</sup>	41,081
TORQUE SENSITIVITY	Kt IN-LBS/AMP [Nm/AMP]	12.4 [1.42]
BACK EMF (LINE TO LINE)	Vrms/Krpm	110.0
D.C. RESISTANCE (P-P)	OHMS	1.1
INDUCTANCE (P-P)	MILLIHENRIES	8.1
ROTOR INERTIA W/BRAKE	Jm [IN-LBS-SEC <sup>2</sup> ] Kg-M <sup>2</sup>	.0099 [0.00112]
STATIC FRICTION	Tf [IN-LBS] [Nm]	1.8 [0.2]

\*25°C AMBIENT WITH A MAXIMUM CASE TEMPERATURE OF 100°C ON MOTOR. MOTOR MOUNTED ON A 12" X 12" X 1/2" ALUMINUM HEATSINK. THERMOSTAT IN STATOR WINDINGS WILL OPEN IF WINDING TEMPERATURE EXCEEDS 155°C. THIS ALLOWS FOR AN APPROXIMATE +10% HEADROOM IN THE CONTINUOUS TORQUE RATING BEFORE THERMOSTAT OPENS.

**MECHANICAL NOTES:**

- AXIAL LOAD: 50 LBS MAX
- RADIAL LOAD: 100 LBS MAX @ 1" FROM FACE
- MOTOR SEALED TO IP65.
- MOTOR WEIGHT: 40.6 LBS. [18.4 kg]
- MOTOR FINISH: BLACK EPOXY
- MOTOR OUTPUT SHAFT: STAINLESS STEEL
- MILLIMETERS (INCHES)

**ENCODER: (290-00052)**

OH48-2000P6-L6-SV

**FAILSAFE BRAKE:**

MIN HOLDING TORQUE: 240 IN-LBS  
INPUT VOLTAGE: 24 VOLTS

**CONNECTION CHART**

MOTOR/BRAKE CONNECTOR:  
PT02E-16-8P(027)  
(270-00032)

PIN	WIRE FUNCTION	WIRE COLOR
A	ΦR	RED
B	ΦS	BLACK
C	ΦT	BLUE
D	PE GND	GRN/YEL
E	BRK SHLD	-
F	BRK (+)	DIODE
G	BRK (-)	1N4007
H	-	-



**ENCODER/THERM CONNECTOR:**

PT02E-14-18P(027)  
(270-00024)


PIN	WIRE FUNCTION	WIRE COLOR
T	GROUND	BLACK
K	+5VDC	RED
B	CH A	BLUE
C	CH A	BLUE/BLK
N	CH B	GREEN
P	CH B	GRN/BLK
M	CH Z	YELLOW
U	CH Z	YEL/BLK
E	CH U	BROWN
R	CH U	BRN/BLK
F	CH V	GRAY
S	CH V	GRAY/BLK
G	CH W	WHITE
H	CH W	WHT/BLK
D	GND/CABLE SHLD	BLK
A	THERM	BLACK
L	THERM	BLACK
J	GND	GRN/YEL

REV	DESCRIPTION	DATE	APPD.
PRELIMINARY		10/24/01	LIN


DATE: 10/24/01  
REV: PRELIMINARY  
DRAWING NUMBER: MPM1143BTGJUN1R  
SCALE: 1/2:1

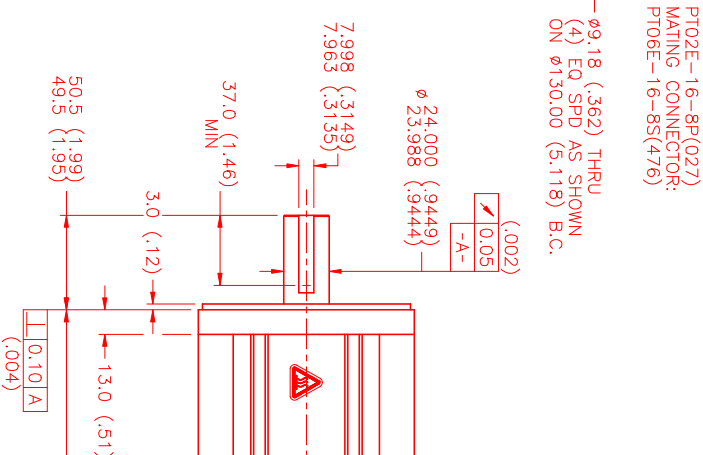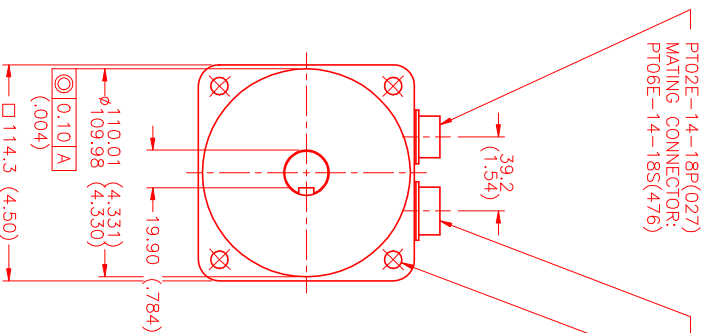

**MOTOR & HALL POSITION CHART**

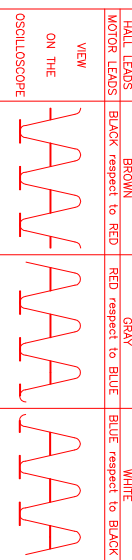

\*MOTOR ROTATION C/W (COUNTER CLOCKWISE) (LOOKING AT THE FACE OF THE MOTOR)  
WAVE REPRESENTING STATOR OUTPUT  
WAVE REPRESENTING HALL SENSOR

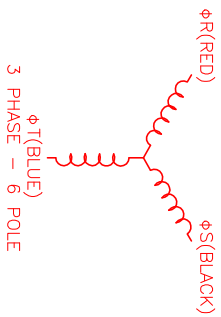

NO.	PART NUMBER	DESCRIPTION	QTY.
UNDESIGNED			
DESIGN: 400 # 400			
DATE: 7/20/99			
DESIGNER: MVS			
CHECKED:			
APPROVED:			

**MTS**  
Automation Division

RESISTANCE AND INDUCTANCE OF THIS MOTOR ARE LISTED IN THE PERFORMANCE CHARACTERISTICS SECTION OF THIS DRAWING. THE MOTOR IS NOT TO BE USED FOR APPLICATIONS WHERE THE MOTOR IS REQUIRED TO OPERATE AT A SPEED OTHER THAN THAT SPECIFIED IN THE PERFORMANCE CHARACTERISTICS SECTION OF THIS DRAWING.