

### MOTOR DATA @ 460 VAC (TRAP)

MOTOR PARAMETERS	UNITS	VALUE
HORSEPOWER	HP	1.63
KILOWATTS	KW	1.22
MAX. OPERATING SPEED	N. MAX RPM	5000
SPEED @ RATED TORQUE	N RATED RPM	4000
* CONTINUOUS RATED TORQUE @ 4000 RPM	IN-LBS[Nm]	25.5[2.9]
* CONTINUOUS STALL TORQUE	IN-LBS[Nm]	30.0[3.4]
CONTINUOUS LINE CURRENT	AMPS	3.7
PEAK TORQUE	IN-LBS[Nm]	105.0[11.9]
PEAK CURRENT	AMPS	12.8
MAX. THEORETICAL ACCEL.	RAD/SEC <sup>2</sup>	105.954
TORQUE SENSITIVITY	Kt [IN-LBS/AMP/Nm/AMP]	8.21[.93]
BACK EMF (LINE TO LINE)	Vrms/Krpm	73.2
D.C. RESISTANCE (P-P)	OHMS	5.52
INDUCTANCE (P-P)	MILLIHENRIES	17.4
ROTOR INERTIA	Jm [IN-LBS-SEC <sup>2</sup> ] Kg-M <sup>2</sup>	0.000991[0.00001116]
STATIC FRICTION	Tf [IN-LBS] [Nm]	.5[.06]

\*25°C AMBIENT WITH A MAXIMUM CASE TEMPERATURE OF 100°C ON MOTOR. MOTOR MOUNTED ON A 10" X 10" X 1/4" ALUMINUM HEATSINK. THERMOSTAT IN STATOR WINDINGS WILL OPEN IF WINDING TEMPERATURE EXCEEDS 155°C. THIS ALLOWS FOR AN APPROXIMATE +10% HEADROOM IN THE CONTINUOUS TORQUE RATING BEFORE THERMOSTAT OPENS.

#### MECHANICAL NOTES:

- AXIAL LOAD: 25 LBS MAX
- RADIAL LOAD: 40 LBS MAX @ 1" FROM FACE
- MOTOR SEALED TO IP65.
- MOTOR WEIGHT: 9.6 LBS. [ 4.4 kg]
- MOTOR FINISH: BLACK EPOXY
- MOTOR OUTPUT SHAFT: STAINLESS STEEL
- MILLIMETERS (INCHES)

ENCODER: (290-00052)  
OH48-2000P6-L6-5V


#### CONNECTION CHART

ENCODER/THERM CONNECTOR:  
PT02E-14-18P(027)  
(270-00024)

ENC/THERM WIRE LEADS	WIRE FUNCTION	WIRE COLOR
T	GROUND	BLACK
K	+5VDC	RED
B	CH A	BLUE
C	CH A	BLUE/BLK
N	CH B	GREEN
P	CH B	GREEN/BLK
M	CH Z	YELLOW
U	CH Z	YEL/BLK
E	CH U	BROWN
R	CH U	BROWN/BLK
F	CH V	GRAY
S	CH V	GRAY/BLK
G	CH W	WHITE
H	CH W	WHITE/BLK
D	GND/CABLE	SHIELD
A	THERM	BLACK
L	THERM	BLACK
J	GND	GRN/YEL

MOTOR CONNECTOR:  
PT02E-14-5P(027)  
(270-00026)



MOTOR WIRE LEADS	PIN	WIRE FUNCTION	WIRE COLOR
A	ΦR	RED	RED
B	ΦS	BLACK	BLACK
C	ΦT	BLUE	BLUE
D	PE GND	GRN/YEL	GRN/YEL
E	-	-	-



#### MOTOR & HALL POSITION CHART

HALL LEADS	BROWN	GRAY	WHITE
MOTOR LEADS	BLACK respect to RED	RED respect to BLUE	BLUE respect to BLACK

\*MOTOR ROTATION CCW (COUNTER CLOCKWISE)  
(LOOKING AT THE FACE OF THE MOTOR)

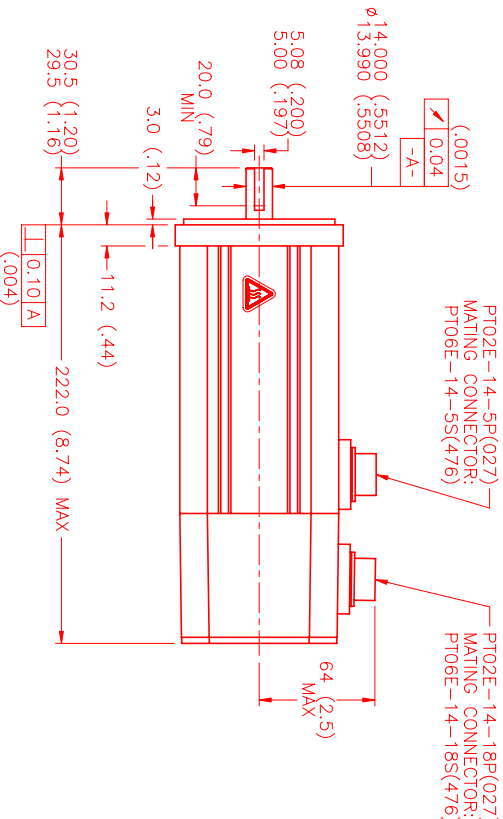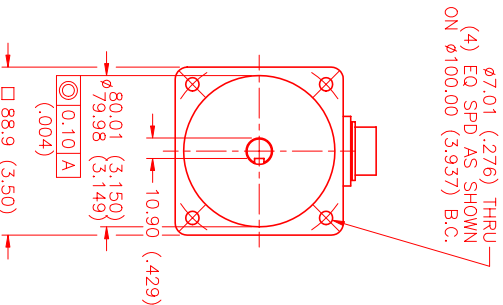

PT02E-14-5P(027)  
MATING CONNECTOR:  
PT06E-14-5S(476)

PT02E-14-18P(027)  
MATING CONNECTOR:  
PT06E-14-18S(476)

NO.	PART NUMBER	DESCRIPTION	QTY.
UNLESS SPECIFIED			
DECIMAL ANG ± .005			
FRAC ANG ± .002			
DIAM ± .002			
ANG ± 1/2°			
DATE: 1/14/99			
DESIGNED BY: JLN			
CHECKED BY:			
DATE: 1/14/99			
TITLE: "C" /TRAP /460 /MET /72 /CONN			
APPROVED BY:			
DRAWN BY: MPM892CTJ7JN1N			
SCALE: 1/2:1			

REV.	DESCRIPTION	DATE	APP.
PRELIMINARY		5/25/99	EJS

MTS Systems Corporation  
Automation Division